


The MOTK 24C is a mobile 20ft containerised tank. Offering a small footprint and modular design to meet your requirements in a flexible, fast and efficient manner.

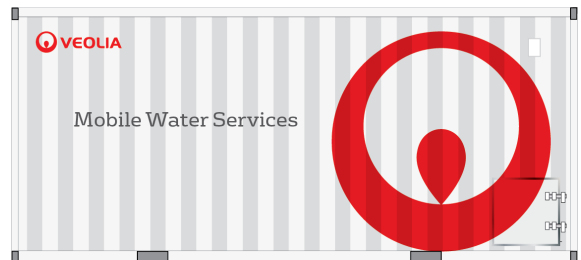

### Performance specification

- Up to 24m<sup>3</sup>/hr capacity
- Pressure valve upto 4 bar (at 25°C)
- Flexible level control
- Automatic filling control
- Visual level indicator
- Isolation valves

### Typical applications

- Commissioning activities
- Combined with pump and houses
- Shortage of supplies
- Process and wastewater treatment
- Intermedia tank
- Buffertank
- Reaction tank for chemicals
- Chemical cleaning tank for MOUF

### Speed of response

Available to despatch to your facility within 4 hours, 24/7, 365 days per year this mobile water tank is capable to meet your water treatment requirements. It is deployed from our strategic located depots to ensure the optimum speed of response and minimal freight time.

### Reliability

The MOTK 24C is designed for simple and reliable operation. A 'Plug and Play' solution, simply connect to your feed water source and receive treated water in an instant at the outlet in a fast and effective way.

### Full service offering

Our MOTK 24C comes complete with connection kits for both the feed, treated water and drain lines. This reduces the time to commission the system and any logistics time to procure these necessary accessories.

### Treated water quality and quantity

All MOTK 24C's come with our unrivalled performance guarantee to ensure your specifications are met at all times.

### Service and operation

Our dedicated team of engineers is available to assist you during start-up and commissioning. Their availability and support can be adapted to meet your requirements.

## Project budget

We recognise the importance of delivering a project to specification and within budget is essential to our customers. We offer a variety of pricing structures to match your requirements and understanding of this critical service.

## Health and safety

As a zero accidents supplier we understand the importance of meeting and exceeding both our customers and our own Health and Safety standards. All our equipment is built and maintained considering the highest operational standards and all personnel are trained on a regular basis to ensure they perform in the safest of environments.

## Ancillary equipment and accessories

A complete range of complementary equipment and accessories can be rented and provided as part of our unique 'Full Service Offer'. This may include pre-treatment, pumps, hoses, and/or additional connection adaptors as required.



Specifications	
Height /Width/Length (mm)	2590 / 2438 / 6096
Capacity (m³)	24
Empty Shipping Weight (kg)	3000
Maximum operating weight (kg)	27000
Material of construction	Mild steel container with epoxy lined tank
Maximum operating pressure (bar)	atmospheric
Maximum operating temperature (°C)	50
Recommended flow rate single tank operation (m³/hr)	0 - 100 tbc
Recommended flow rate two tank operation (m³/hr)	100 - 200 tbc
Handling	Lifting lugs and forklift ports
Electrical supply	220V 1 ph ac 16A CEE connector
Connections Inlet	1 x DIN 100 PN16 flange + butterfly valve
Connections Outlet	1 x DIN 100 PN16 flange + butterfly valve
Connections Overflow	1 x DIN 100 PN16 flange
Connections Drain	1 x DIN 100 PN16 flange + butterfly valve
Connections Tanks return	1 x DIN 100 PN16 flange + butterfly valve or adjustable pressure sustaining valve